



LUMENSOURCE

SPECIFICATION GRADE LED

Project: _____

Date: _____


Notes: _____

Configuration: _____

CONTEMPORARY

EA & EB SERIES

The Lumensource Posts provides an excellent replacement to traditional light sources such as fluorescent and metal halide. Heavy wall cast aluminum housing with heavy support & heavy gauge spun aluminum cover provides high performance, energy saving, and long lasting light output perfect for area lighting needs.

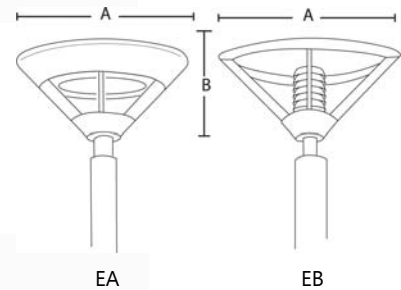

FEATURES

- Universal input voltage for easy installation
- Protective powder coating for lasting appearance
- EA - Clear tempered glass lens; EB - Clear impact resistant acrylic lens
- EA - Specular aluminum reflector; EB - Specular louver reflector
- Extruded and/or cast aluminum arms

ORDERING INFORMATION

Standard Configuration:



Model

CON- Contemporary

Series

- EAA - 27 5/8" A x 16" B
- EAB - 20" A x 13" B
- EBA - 27 5/8" A x 16" B
- EBB - 20" A x 13" B

Wattage

- 40W
- 80W
- 120W

Color

- W - Warm White 3000K
- C - Cool white 5000K

Voltage

120, 208, 240, 277,
347*, 480*, (VAC input)

Optics

- LR - Louver Reflectors
- GR3 - Type 3 Glass Reflector
- GR5 - Type 5 Glass Reflector



LR-Louver Reflector



GR-Glass Reflector



DR-Diffused Reflector

Mounting



WM - Wall Mount



PT - Post Top




1A - Single



2A - Twin 180

* Consult factory for availability

Arm

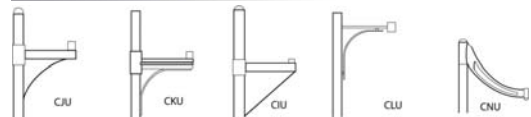

Finish

- BK - Black
- BZ - Bronze
- GR- Green
- VG - Verde Green
- CC- Custom Color

Options

- HS - House Shield
- FS - Fuse
- PC - Photo Cell
- SP - Surge Protector

2964 W Valley Blvd., Alhambra, CA., 91803 USA
Tel: 626-570-9333 Fax: 626-570-9777
Inquiries: answers@lumensource.biz
Visit: lumensource.biz

