



# LUMENSOURCE

SPECIFICATION GRADE LED

Project: \_\_\_\_\_

Date: \_\_\_\_\_


Notes: \_\_\_\_\_

Configuration: \_\_\_\_\_

## CONTEMPORARY

### GF & GG SERIES

The Lumensource Posts provides an excellent replacement to traditional light sources such as fluorescent and metal halide. White or clear polycarbonate housing, cast aluminum sphere holder and cast aluminum guard provides high performance, energy saving, and long lasting light output perfect for area lighting needs.

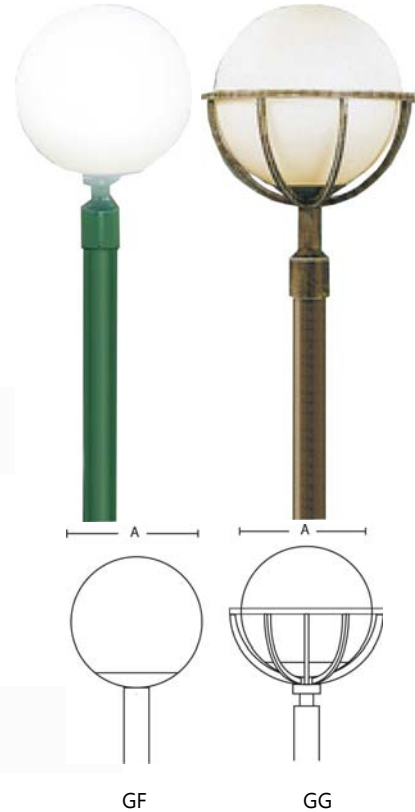


## FEATURES

- Universal input voltage for easy installation
- Protective powder coating for lasting appearance

## ORDERING INFORMATION

Standard Configuration:



### Model

CON- Contemporary

### Series

GFS, GGS - 16" A  
GFM, GGM - 18" A  
GFL, GGL - 22" A

### Wattage

40W  
80W  
120W

### Color

W - Warm White 3000K  
C - Cool white 5000K

\* Consult factory for availability

### Voltage

120, 208, 240, 277,  
347\*, 480\*, (VAC input)

### Optics

CS - Clear Sphere  
WS - White Sphere  
LR - Louver Reflector  
GR3 - Type 3 Glass Reflector  
GR5 - Type 5




LR-Louver Reflector



GR-Glass Reflector

### Mounting

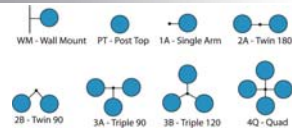

### Finish

BK - Black  
BZ - Bronze  
GR- Green  
VG - Verde Green  
CC- Custom Color

### Options

HS - House Shield  
FS - Fuse  
PC - Photo Cell  
SP - Surge Protector

2964 W Valley Blvd., Alhambra, CA., 91803 USA  
Tel: 626-570-9333 Fax: 626-570-9777  
Inquiries: answers@lumensource.biz  
Visit: lumensource.biz

