



LUMENSOURCE

SPECIFICATION GRADE LED

Project: _____

Date: _____


Notes: _____

Configuration: _____

ARCHITECTURAL

LY SERIES

The Lumensource Architectural fixtures provides an excellent replacement to traditional light sources such as metal halide. Heavy gauge spun aluminum housing provides high performance, energy saving, and long lasting light output perfect for area lighting needs.




FEATURES

- Universal input voltage for easy installation
- Protective powder coating for lasting appearance
- Segmented specular Alzak reflector
- Extruded or/and cast aluminum arms

ORDERING INFORMATION

Standard Configuration:



Model

ARC - Architectural

Series

LYL - 26" A x 16" B
LYM - 20" A x 12" B

Wattage

20W
40W

Color

W - Warm White 3000K
C - Cool white 5000K

Voltage


120	347*
208	480*
240	(VAC input)
277	

Lens

FG - Flat Glass
CG - Convex Glass



Mounting

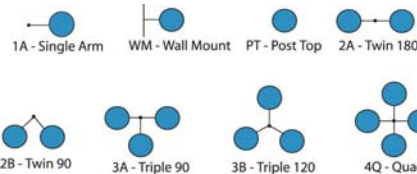

Finish

BK - Black
BZ - Bronze
GR- Green
VG - Verde Green
CC- Custom Color

Options

RPC - Receptacle and Photo Control
HS - House Shield
FS - Fuse
PC - Photo Cell
SP - Surge Protector

* Consult factory for availability

2964 W Valley Blvd., Alhambra, CA., 91803 USA
Tel: 626-570-9333 Fax: 626-570-9777
Inquiries: answers@lumensource.biz
Visit: lumensource.biz

