



LUMENSOURCE

SPECIFICATION GRADE LED

Project: _____

Date: _____


Notes: _____

Configuration: _____

ARCHITECTURAL

SB SERIES

The Lumensource Architectural fixtures provides an excellent replacement to traditional light sources such as metal halide. Heavy gauge die formed welded aluminum internally sealed for weatherproofing housing provides high performance, energy saving, and long lasting light output perfect for area lighting needs.

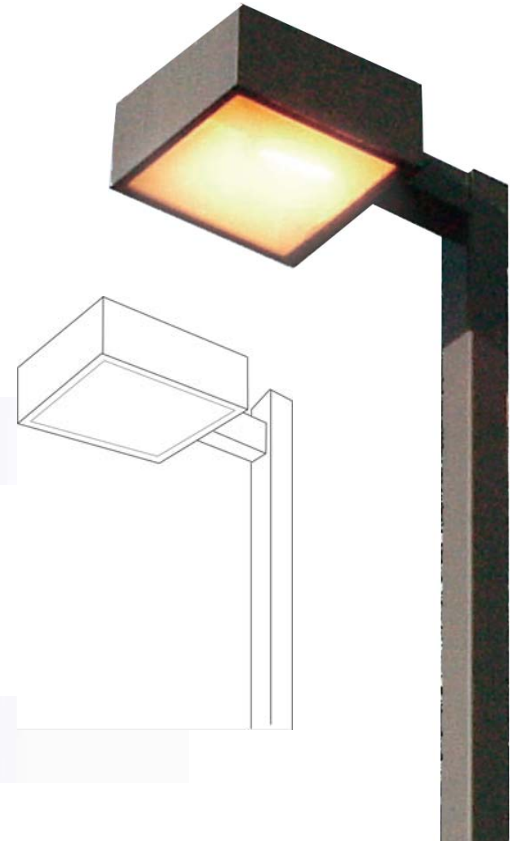


FEATURES

- Universal input voltage for easy installation
- Protective powder coating for lasting appearance
- Segmented specular Alzak reflector
- Extruded or/and cast aluminum arms

ORDERING INFORMATION

Standard Configuration:



Model

ARC - Architectural

Series

SBA - 16" A x 6" B x 16" C
 SBB - 19" A x 6" B x 19" C
 SBC - 26" A x 10" B x 26" C

Wattage

20W
 40W

Color

W - Warm White 3000K
 C - Cool white 5000K


Voltage

120 347*
 208 480*
 240 (VAC input)
 277

Lens

FG - Flat Glass 
 CG - Convex Glass 

Mounting

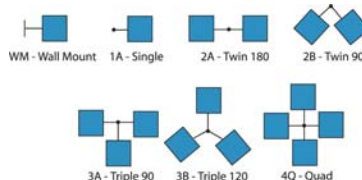

Finish

BK - Black
 BZ - Bronze
 GR- Green
 VG - Verde Green
 CC- Custom Color

Options

RPC - Receptacle and Photo Control
 HS - House Shield
 FS - Fuse
 PC - Photo Cell
 SP - Surge Protector

* Consult factory for availability

2964 W Valley Blvd., Alhambra, CA., 91803 USA
 Tel: 626-570-9333 Fax: 626-570-9777
 Inquiries: answers@lumensource.biz
 Visit: lumensource.biz

