



LUMENSOURCE

SPECIFICATION GRADE LED

Project: _____

Date: _____

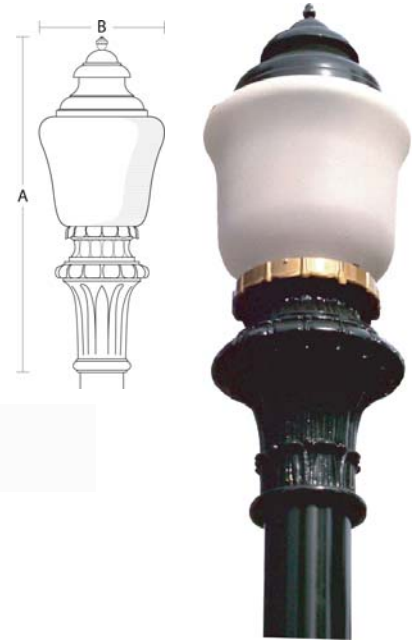
Notes: _____

Configuration: _____

DECORATIVE

CP SERIES

The Lumensource Posts provides an excellent replacement to traditional light sources such as fluorescent and metal halide. Corrosion resistant cast A356 aluminum alloy pole fitter provides high performance, energy saving, and long lasting light output perfect for area lighting needs.















FEATURES

- Universal input voltage for easy installation
- Protective powder coating for lasting appearance
- Spun aluminum hood 1/8" thick with (2) 1" O.D. extruded aluminum supports

ORDERING INFORMATION

Standard Configuration:



Model	Voltage	Mounting
POS-Post	120	
Series	208	
	240	
	277	
ACA-31" A x 31.5" B	(VAC input)	WM-Wall Mount PT-Post 1S-Single 2T-Twin
Wattage	Finish	Arm
40W	BL - Black BZ - Bronze GR- Green VG - Verde Green CC- Custom Color	
80W		
120W		
		
		
Color	Optics	
W - Warm White 3000K		
C - Cool white 5000K		
		
	LR-Lower Reflector GR-Glass Reflector DR-Diffused Reflector	

2964 W Valley Blvd., Alhambra, CA., 91803 USA
 Tel: 626-570-9333 Fax: 626-570-9777
 Inquiries: answers@lumensource.biz
 Visit: lumensource.biz

