



LUMENSOURCE

SPECIFICATION GRADE LED

Project: _____

Date: _____


Notes: _____

Configuration: _____

DECORATIVE

LD SERIES

The Lumensource Posts provides an excellent replacement to traditional light sources such as fluorescent and metal halide. Corrosion resistant cast A356 aluminum alloy pole fitter provides high performance, energy saving, and long lasting light output perfect for area lighting needs.

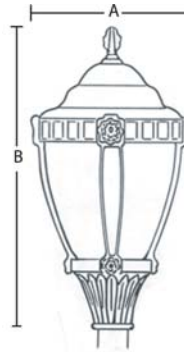

FEATURES

- Universal input voltage for easy installation
- Protective powder coating for lasting appearance
- Spun aluminum hood 1/8" thick with (2) 1" O.D. extruded aluminum supports

ORDERING INFORMATION

Standard Configuration:



Model

POS-Post

Series

ACA-31" A x 31.5" B

Wattage

40W
80W
120W

Color

W - Warm White 3000K
C - Cool white 5000K


Voltage

120
208
240
277
(VAC input)

Finish


BL - Black
BZ - Bronze
GR- Green
VG - Verde Green
CC- Custom Color

Mounting



WM-Wall Mount PT-Post 1S-Single 2T-Twin

Arm

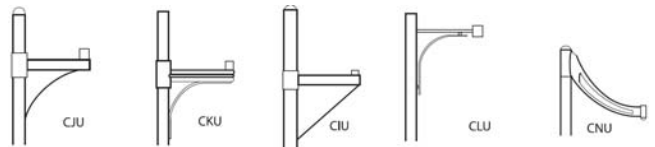

Optics



LR-Lower Reflector GR-Glass Reflector DR-Diffused Reflector

2964 W Valley Blvd., Alhambra, CA., 91803 USA
Tel: 626-570-9333 Fax: 626-570-9777
Inquiries: answers@lumensource.biz
Visit: lumensource.biz

