



LUMENSOURCE

SPECIFICATION GRADE LED

Project: _____

Date: _____

Notes: _____

Configuration: _____

CONTEMPORARY

VK SERIES

The Lumensource Posts provides an excellent replacement to traditional light sources such as fluorescent and metal halide. Spun aluminum hood with (2) 3/4" O.D. extruded aluminum supports and cast aluminum pole fitter housing provides high performance, energy saving, and long lasting light output perfect for area lighting needs.


FEATURES

- Universal input voltage for easy installation
- Protective powder coating for lasting appearance
- Segmented specular Alzak reflector



ORDERING INFORMATION

Standard Configuration:



Model

CON- Contemporary

Series

VK - 25 1/2" A x 21 1/8" B

Wattage

40W, 80W, 120W

Color

W - Warm White 3000K
C - Cool white 5000K

Voltage

120, 208, 240, 277,
347*, 480*, (VAC input)

Lens


FG - Flat Glass
CG - Convex Glass



Mounting



Arms

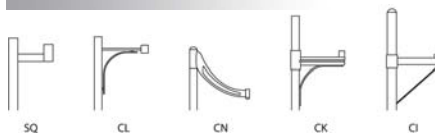

Finish

BK - Black
BZ - Bronze
GR - Green
VG - Verde Green
CC - Custom Color

Options

HS - House Shield
FS - Fuse
PC - Photo Cell
SP - Surge Protector

* Consult factory for availability

2964 W Valley Blvd., Alhambra, CA., 91803 USA
Tel: 626-570-9333 Fax: 626-570-9777
Inquiries: answers@lumensource.biz
Visit: lumensource.biz

